

User friendly control panel

- emergency stop
- service indicator
- battery status display

Hand control

Detachable for optimal ergonomic steering.

SmartPack

Easily switch the battery pack to extend runtime through multiple shifts.

- Flexible solution for lifting and transporting everything from reels to drums in an ergonomic and efficient manner.
- Available in two mast sizes; M and L.
- The lifter is available in stainless steel, equipped with a white FDA approved cover, ideal for food manufacturing and pharmaceutical industry
- SafeDrive ensures that if a tool hits an object during lowering, it will stop immediately.
- The lifter is belt driven, resulting in safe, quiet and smooth oil free drive.
- Available with manual or electrical EasyTurn.

Contact your sales representative for bespoke solutions.

CE




[Call us!](#)

Technical specifications


| Description | Specifications |
|-------------------------------------|-------------------------------------|
| PRO100MESE /LESE /MESM /LESM | 89610 / 89620 / 89612 / 89622 |
| PRO100MESESS /ESESS /MESMSS /LESMSS | 89615 / 89625 / 89617 / 89627 |
| Lifting capacity | 100 kg / 220 lbs |
| Stroke | 1390 / 1940 mm |
| Weight of unit | 115 / 120 kg |
| Total height of unit | 1990 / 2540 mm |
| Battery charger | 100-240V, grounded 50-60 Hz |
| Battery | 2x12V 17Ah |
| Watt | 80 W |
| Lifts per charge | 100 kg x 1m x 100 times |
| Up and down motions | Hand control (two speed) |
| Front wheels | Fixed |
| Brake system | Central brake with directional lock |
| Overload protection | Incorporated in circuit load |
| IP-rating | IP24 |
| Lifting speed fast/slow | 0,1m/s / 0,05m/s |

| Description | Specifications |
|----------------------------|-------------------------------------|
| PRO200MESE / PRO200LESE | 89710 / 89720 |
| PRO200MESESS /PRO200LESESS | 89715 / 89725 |
| Lifting capacity | 200 kg / 440 lbs |
| Stroke | 1360 / 1910 mm |
| Weight of unit | 152 / 158 kg |
| Total height of unit | 1990 / 2540 mm |
| Battery charger | 100-240V, grounded 50-60 Hz |
| Battery | 2x12V 17Ah |
| Watt | 80 W |
| Lifts per charge | 200 kg x 1m x 100 times |
| Up and down motions | Hand control (two speed) |
| Front wheels | Fixed |
| Brake system | Central brake with directional lock |
| Overload protection | Incorporated in circuit load |
| IP-rating | IP24 |
| Lifting speed fast/slow | 0,1m/s / 0,05m/s |


Load diagram

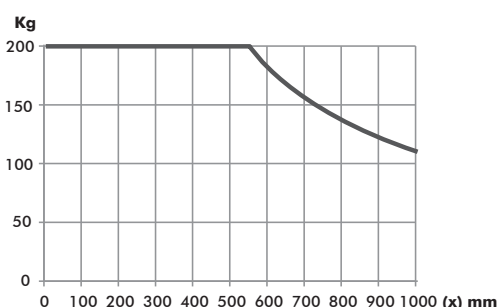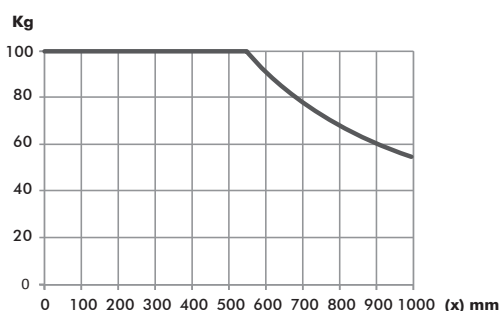

PRO100ESE

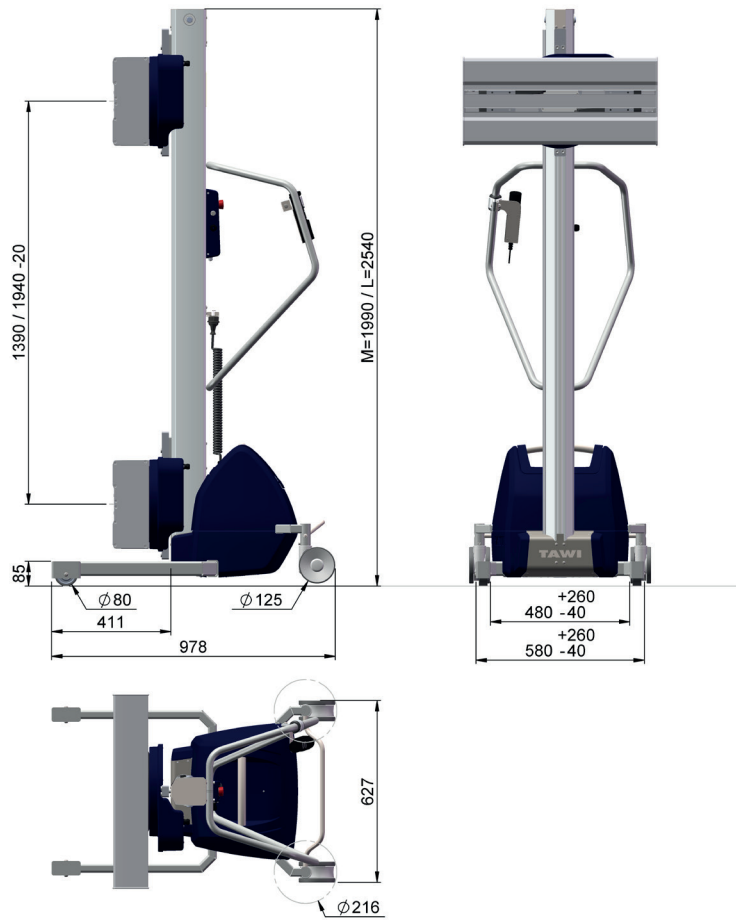

PRO200ESE

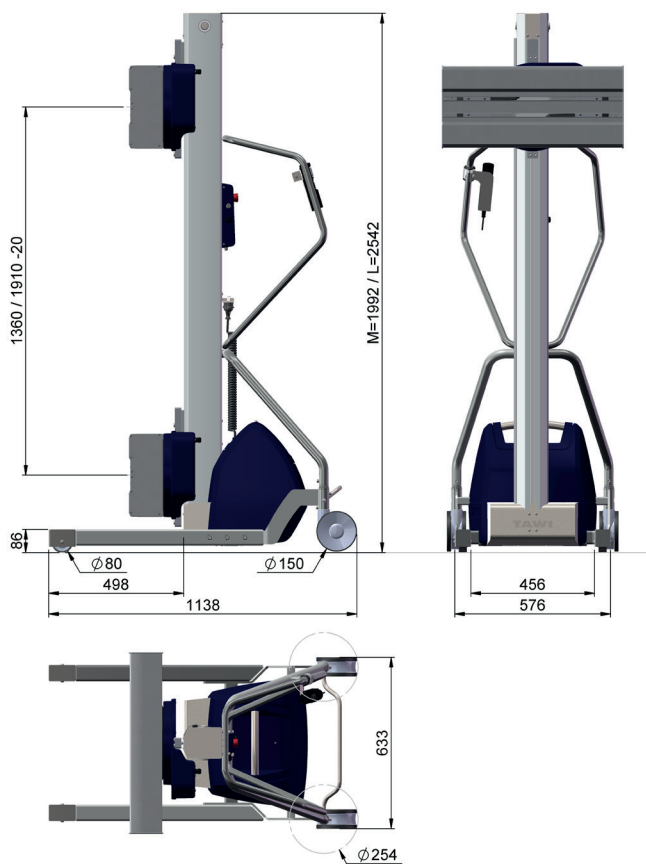

All measures are LxWxH




A2 = Stainless steel
FZB = Zincified mild steel



Fixed arms

Safely lift and transport goods of varying sizes with fixed arms mounted on your PRO100ESE.




Art. 896800
For reels Ø350-620 mm

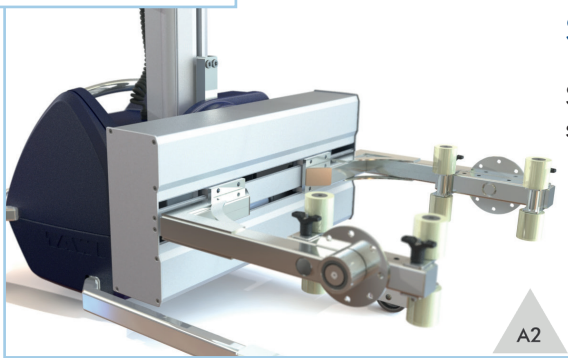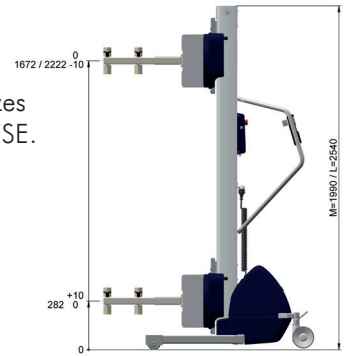

Swiveling arms

Safely lift, tilt and rotate goods of varying sizes with swiveling arms mounted on your PRO100ESE.




Art. 896810
For reels Ø260-530 mm

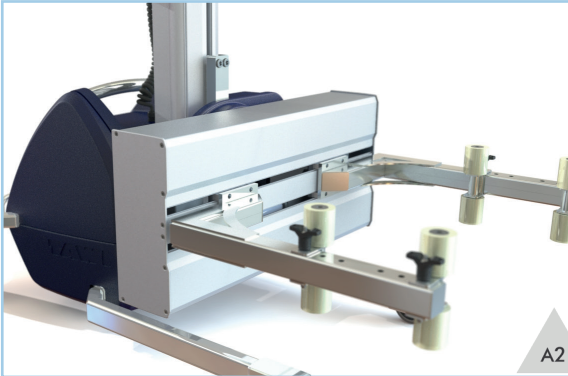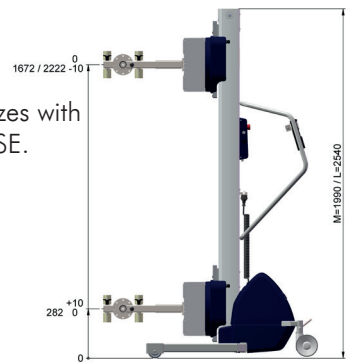

Fixed arms

Safely lift and transport goods of varying sizes with fixed arms mounted on your PRO200ESE.

Art. 897800
For reels Ø350-620 mm

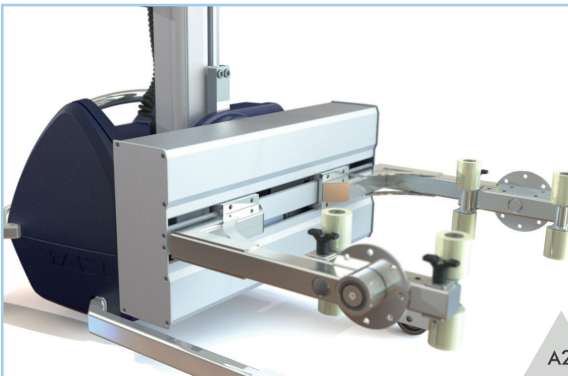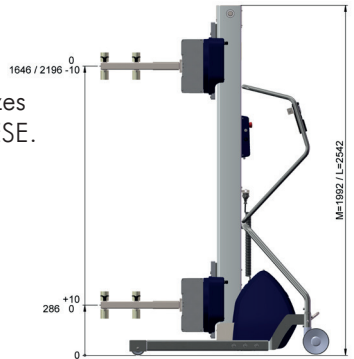

Swiveling arms

Safely lift, tilt and rotate goods of varying sizes with swiveling arms mounted on your PRO200ESE.

Art. 897810
For reels Ø260-530 mm

